

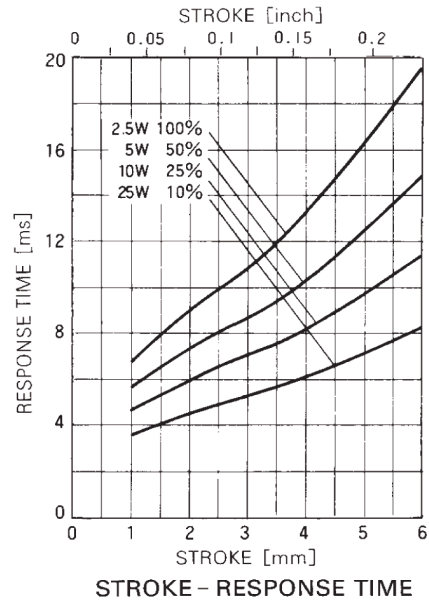


# SK0626A OPEN FRAME SOLENOID

UNIT :  $\frac{\text{mm}}{(\text{inch})}$   
SHOWN ENERGIZED

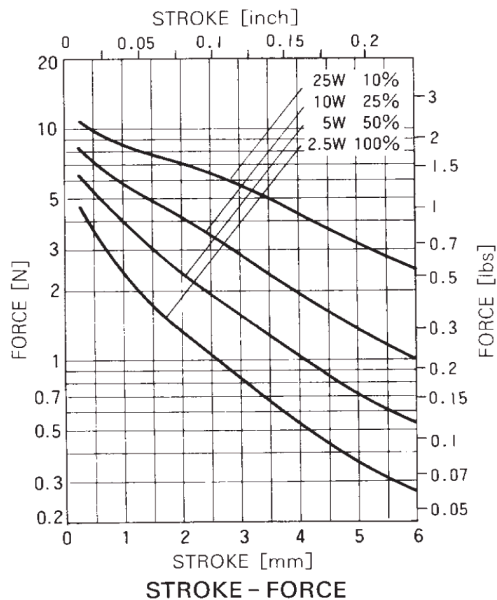

WEIGHT : 43g  
PLUNGER : 7g

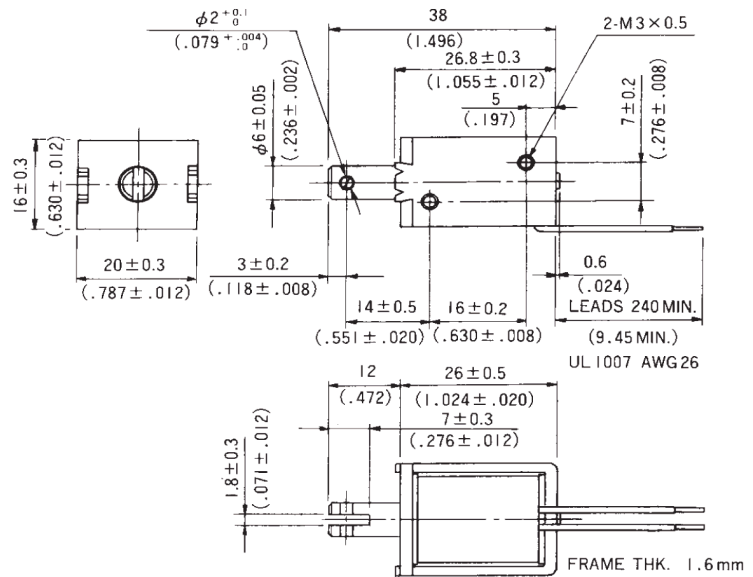

## COIL DATA

without heat sink

|             | duty cycle = $\frac{\text{"on" time}}{\text{"on" time} + \text{"off" time}} \times 100\%$ |           | 100%<br>continuous | 50%<br>or less | 25%<br>or less | 10%<br>or less |
|-------------|-------------------------------------------------------------------------------------------|-----------|--------------------|----------------|----------------|----------------|
|             | MAX. "on" time in seconds                                                                 |           | $\infty$           | 100            | 36             | 7              |
|             | watts at 20°C                                                                             |           | 2.5                | 5.0            | 10.0           | 25.0           |
|             | ampere-turns at 20°C                                                                      |           | 428                | 605            | 856            | 1353           |
| type no.    | resistance<br>$\Omega \pm 10\%$ (at 20°C)                                                 | no. turns | volts DC           |                |                |                |
| SK0626A06AA | 14                                                                                        | 1090      | 6                  | 8.5            | 12             | 19             |
| SK0626A12AA | 58                                                                                        | 2090      | 12                 | 17             | 24             | 38             |
| SK0626A24AA | 230                                                                                       | 4110      | 24                 | 34             | 48             | 76             |
| SK0626A48AA | 922                                                                                       | 8200      | 48                 | 68             | 96             | 152            |

(주)신우솔텍 TEL : 02-584-5995